


# AENL-3 WISCONSIN

9.2 HP Gasoline

## Standard Features

- Single-Cylinder
- Air cooled
- Forged-steel crankshaft with tapered roller main bearings
- Heavy-duty cast-iron block
- Forged steel connecting rod
- Cast iron cylinders
- Centrifugal flyball type governor
- Aluminum alloy pistons
- Heat resistant alloy steel valves
- Replaceable valve guides
- Flywheel magneto ignition
- 1.7 gallon fuel tank (6.4 liter)

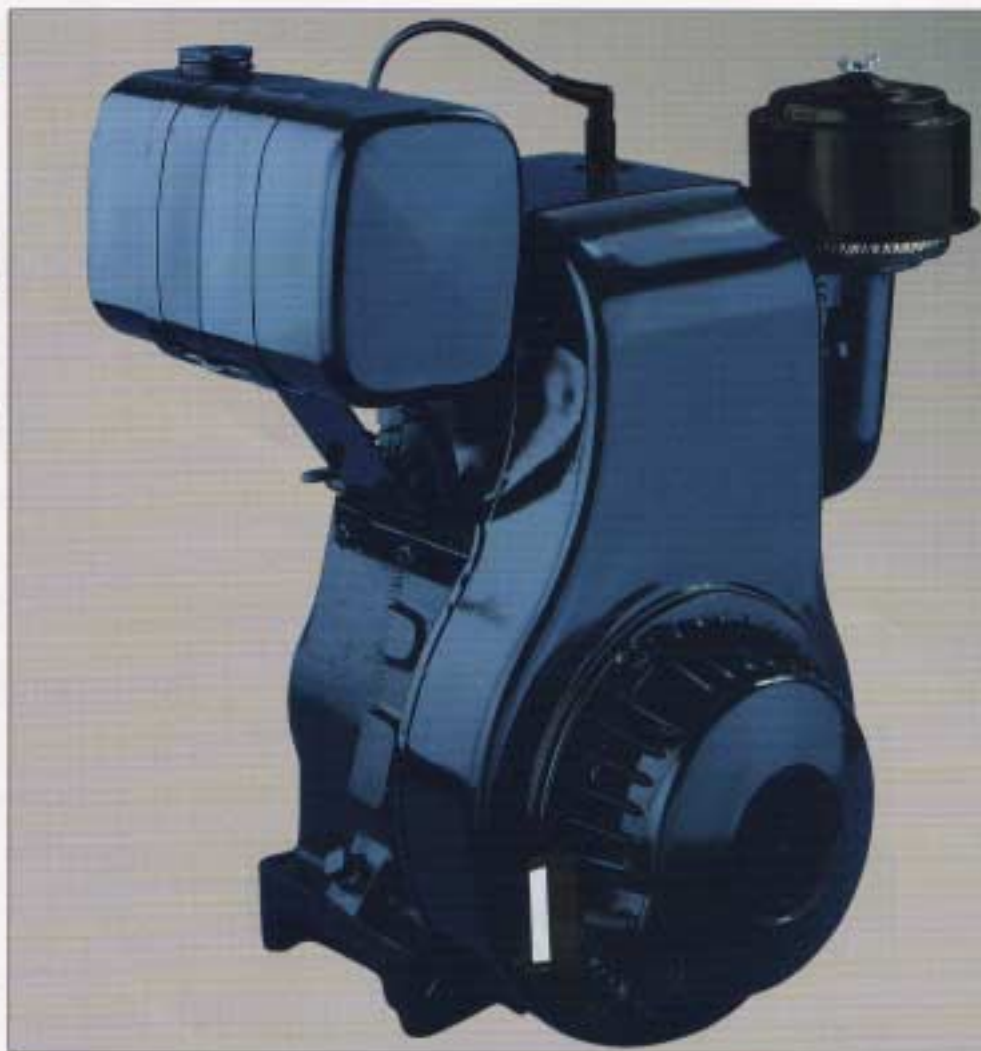

## Your Heavy-Duty Source of Power

Setting industry standards since 1909, Wisconsin continues to offer you a wide selection of air-cooled gasoline engines. Seven models allow you to choose from single-cylinder, twin-cylinder and four-cylinder engines with power ranging from 7.0 to 65.9 HP.

### WISCONSIN CONSTRUCTION

Wisconsin engines are designed for those tough applications that require durability and long life reliability. The multi-cylinder, v-block design offers

unique side load capability for a variety of industrial applications.

### WORLDWIDE PARTS AND SERVICE


We back our engines with a worldwide service network. Experienced Wisconsin representatives are always ready to meet your needs.



**WISCONSIN  
MOTORS, LLC**

# AENL-3 WISCONSIN

## 9.2 HP Gasoline

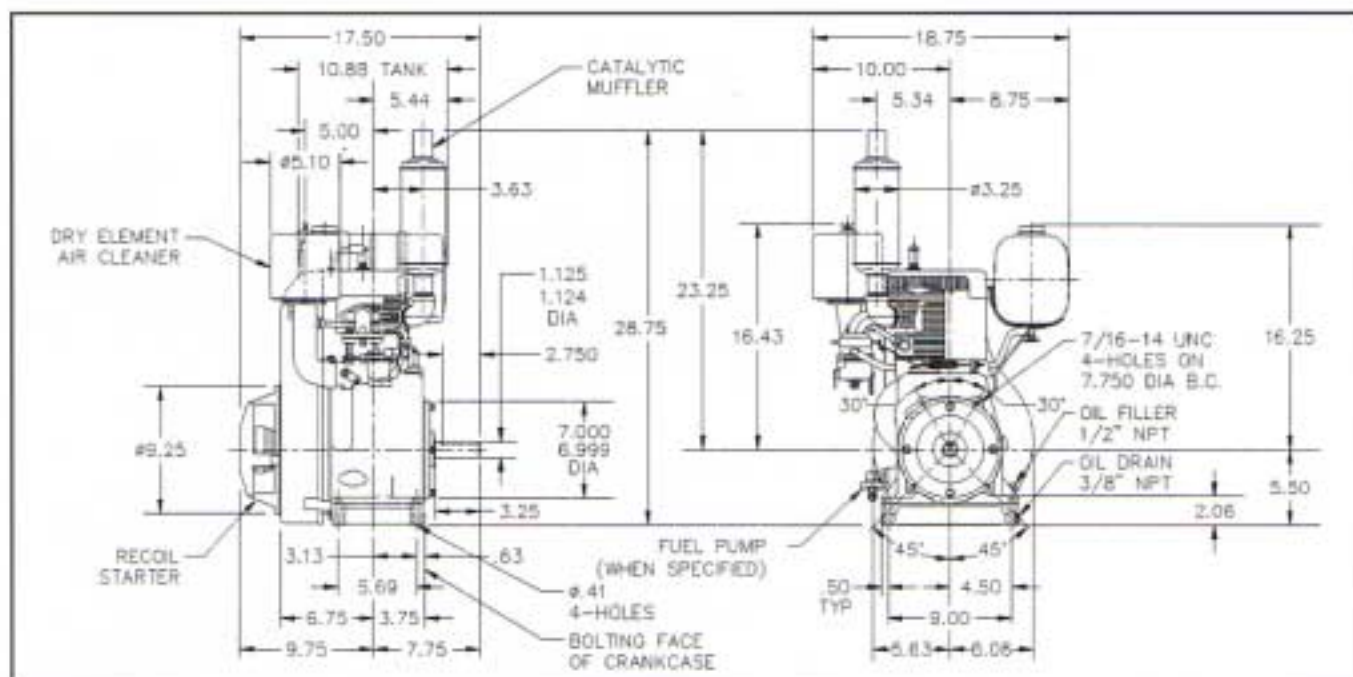

Net Weight - Dry Standard Engine 110 lbs. (50 kg)

**Bore** ..... 3.00 in. (76 mm)  
**Stroke** ..... 3.25 in. (82.5 mm)  
**Displacement** ..... 23 cu. in. (377 cc)

RPM	HP	Kw	TORQUE	
			Ft. Lbs.	Kg-m
2000	6.1	4.6	192.2	2.22
2200	6.8	5.1	194.8	2.25
2400	7.4	5.5	194.3	2.24
2600	7.9	5.9	191.5	2.21
2800	8.5	6.3	191.3	2.20
3000	8.9	6.6	187.0	2.15
3200	9.2	6.9	181.2	2.09
3400	9.2	6.9	170.5	1.97
3600	9.2	6.9	161.1	1.86

### Power Output

Maximum dynamometer net brake horsepower of the basic engine corrected to a pressure reading of 29.31 in. Hg (99 kPa) dry barometer and temperature of 77° F (25° C) when tested in accordance with SAE Test Code J1349. Engine output can be demonstrated within 5% at the factory under standard rating conditions. Power will decrease 3.5% for each 1,000 ft. (305 M) above 500 feet and 1% for each 10° F above standard temperature of 77° F (25° C). For continuous operation, applications should be limited to 80% of power shown.

### Options for Every Need

- Heavy duty dry element air cleaner
- SAE bell housings and drive hubs
- Choice of clutches, clutch reduction take-offs and reducers
- Long life exhaust valves and inserts with valve rotation
- Multiple crankshaft configurations
- Electric fuel pump
- Larger capacity fuel tanks
- High-temperature safety switch
- 12 volt, 25 amp flywheel alternator

Contact your WISCONSIN representative for additional options.



**WISCONSIN  
MOTORS, LLC**

SALES OFFICE:

2020 Fletcher Creek Drive • Memphis, Tennessee 38133  
 Phone: (901) 371-0353 • Toll Free: 800-932-2858

January 2002  
 UT20147